


 **Testa Piana**
Cilindrico Rullato Aperto
INOX A2

 **Flat Head**
Cylindrical Grooved Open End
STAINLESS STEEL A2

Cilindrico
Cylindrical

LFKNI2

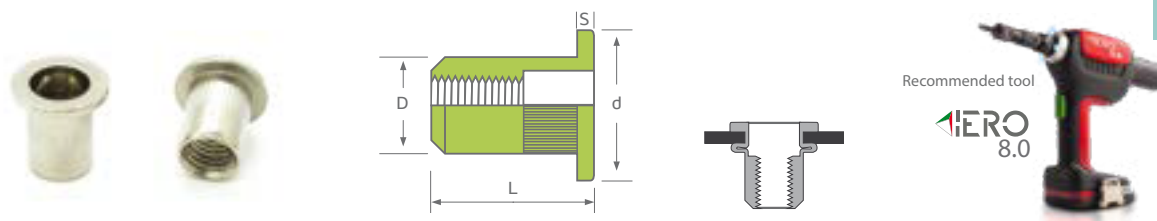

	L mm.	E mm.		D mm.	d mm.	S mm.			Codice Code
M3	10,0	0,5 - 3,0	ø 5,0	4,9	6,5	1,0	4.000	1,20	BTR03100LFKNI2
M4	10,0	0,5 - 3,0	ø 6,0	5,9	8,5	1,0	6.800	3,0	BTR04100LFKNI2
	12,0	3,1 - 4,0							BTR04120LFKNI2
M5	12,0	0,5 - 3,0	ø 7,0	6,9	9,5	1,0	10.000	6,0	BTR05120LFKNI2
	15,0	3,1 - 6,0							BTR05150LFKNI2
M6	14,5	0,5 - 3,0	ø 9,0	8,9	12,5	1,5	15.000	10,0	BTR06145LFKNI2
	17,7	3,1 - 6,0							BTR06177LFKNI2
M8	16,0	0,5 - 3,0	ø 11,0	10,9	15,5	1,5	27.000	24,0	BTR08160LFKNI2
	19,0	3,1 - 6,0							BTR08190LFKNI2
M10	17,0	0,5 - 3,0	ø 13,0	12,9	18,5	2,0	37.000	48,0	BTR10170LFKNI2
	22,0	3,1 - 6,5							BTR10220LFKNI2
M12	25,0	1,0 - 4,0	ø 16,0	15,9	---	2,0	54.000	82,0	BTR12250LFKNI2



Il valore del TAGLIO varia a seconda della superficie, della dimensione e del materiale delle viti.
The value of SHEAR varies depending on surface, dimension and material of screws.