


 **Testa Piana**
Cilindrico Rullato Aperto
ACCIAIO

 **Flat Head**
Cylindrical Grooved Open End
STEEL

Cilindrico
Cylindrical

LFKNS

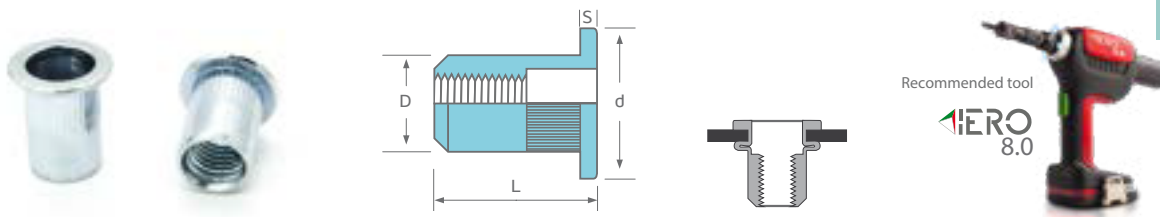

	L mm.	E mm.		D mm.	d mm.	S mm.			Codice Code
M3	10,0	0,5 - 3,0	ø 5,0	4,9	6,5	1,0	4.000	1,2	BTR03100LFKNS
M4	10,0	0,5 - 3,0	ø 6,0	5,9	8,5	1,0	6.800	3,0	BTR04100LFKNS
	12,0	3,1 - 4,0							BTR04120LFKNS
M5	12,0	0,5 - 3,0	ø 7,0	6,9	9,5	1,0	10.000	6,0	BTR05120LFKNS
	15,0	3,1 - 6,0							BTR05150LFKNS
M6	14,5	0,5 - 3,0	ø 9,0	8,9	12,5	1,5	15.000	10,0	BTR06145LFKNS
	17,5	3,1 - 6,0							BTR06175LFKNS
M8	16,0	0,5 - 2,0	ø 11,0	10,9	15,5	1,5	27.000	24,0	BTR08160LFKNS
	17,5	1,0 - 3,0						24,0	BTR08175LFKNS
	19,0	3,1 - 5,5						24,5	BTR08190LFKNS
M10	17,0	1,0 - 3,5	ø 13,0	12,9	18,5	2,0	37.000	48,5	BTR10170LFKNS
	22,0	3,5 - 6,0						48,0	BTR10220LFKNS
M12	23,0	1,0 - 4,0	ø 16,0	15,9	22,5	2,0	54.000	82,0	BTR12230LFKNS
	26,0	4,1 - 6,0						82,0	BTR12260LFKNS

 Il valore del TAGLIO varia a seconda della superficie, della dimensione e del materiale delle viti.
The value of SHEAR varies depending on surface, dimension and material of screws.