


 **Testa a Filo**
Cilindrico Rullato Aperto
ACCIAIO

 **Reduced Head**
Cylindrical Grooved Open End
STEEL

Cilindrico
Cylindrical

TSKNS

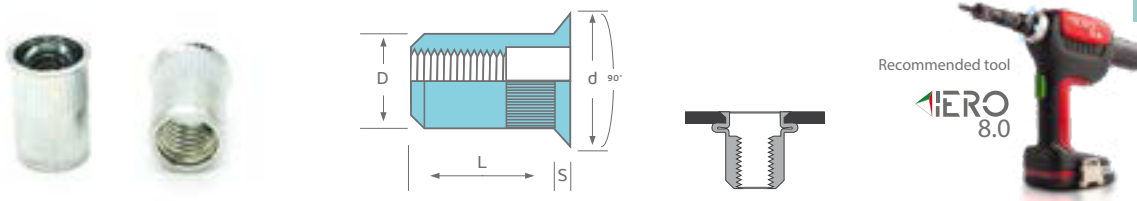

	L mm.	E mm.	 mm.	D mm.	d mm.	S mm.	 N.	 Nn.	Codice Code
M3	9,0	0,5 - 3,0	ø 5,0	4,9	5,5	0,3	---	—	BTR03090TSKNS
M4	10,0	0,5 - 3,0	ø 6,0	5,9	6,5	0,5	6.800	3,0	BTR04100TSKNS
M5	11,5	0,5 - 3,0	ø 7,0	6,9	7,5	0,5	10.000	6,0	BTR05115TSKNS
M6	14,0 16,0	0,5 - 3,0 3,0 - 4,5	ø 9,0	8,9	9,5	0,5	15.000	10,0	BTR06140TSKNS BTR06160TSKNS
M8	15,5 17,5	0,5 - 3,0 3,0 - 4,5	ø 11,0	10,9	11,5	0,5	27.000	24,0	BTR08155TSKNS BTR08175TSKNS
M10	19,5 21,5	0,5 - 3,5 3,5 - 6,0	ø 13,0	12,9	13,5	0,7	37.000	48,0	BTR10195TSKNS BTR10215TSKNS
M12	24,0	1,0 - 4,0	ø 16,0	15,9	17,5	0,7	54.000	82,0	BTR12240TSKNS



 Il valore del TAGLIO varia a seconda della superficie, della dimensione e del materiale delle viti.
The value of SHEAR varies depending on surface, dimension and material of screws.